

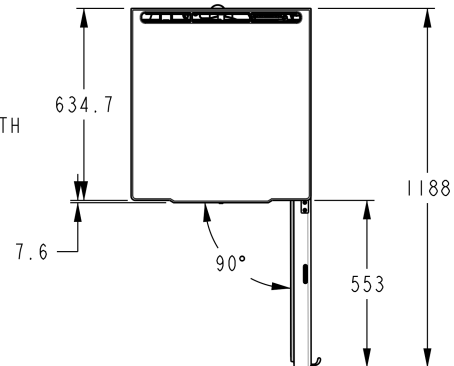
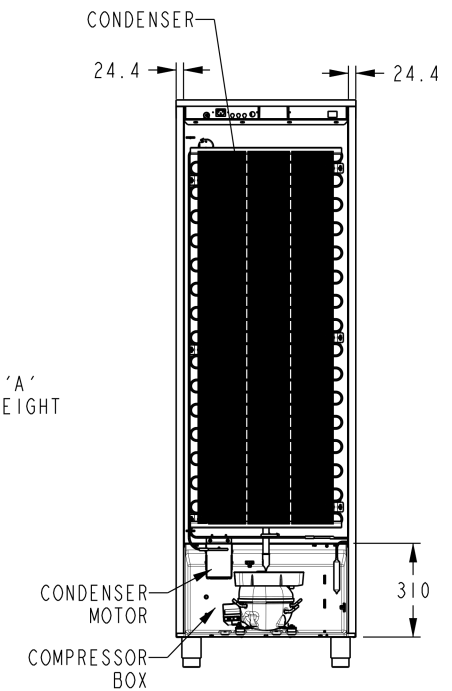
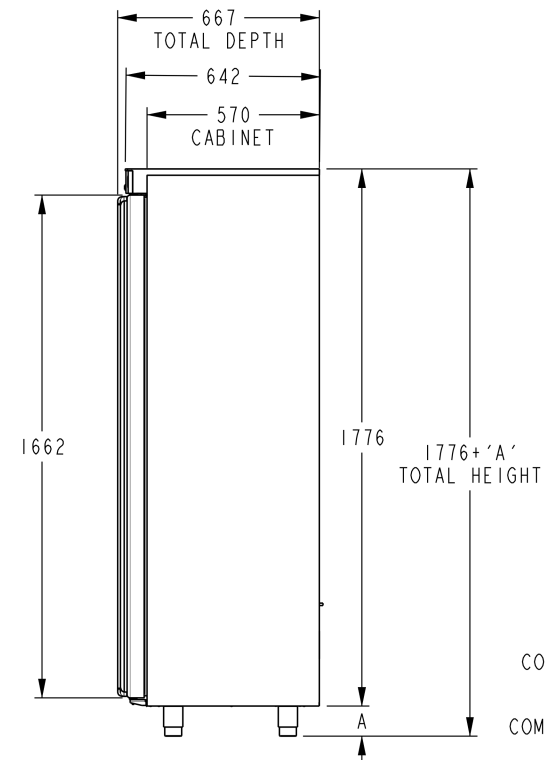


WITHOUT DOOR
SECTION C-C
SCALE 0.040

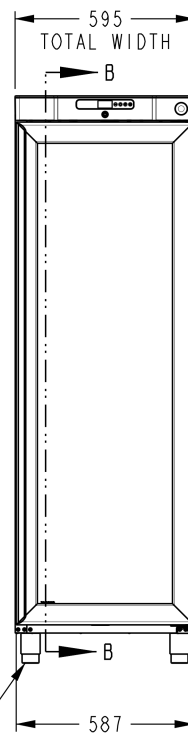

	DIM 'A'
ADJUSTABLE LEG 100-130mm	100mm
ADJUSTABLE LEG 130-200mm	130mm
CASTOR WHEEL	125mm

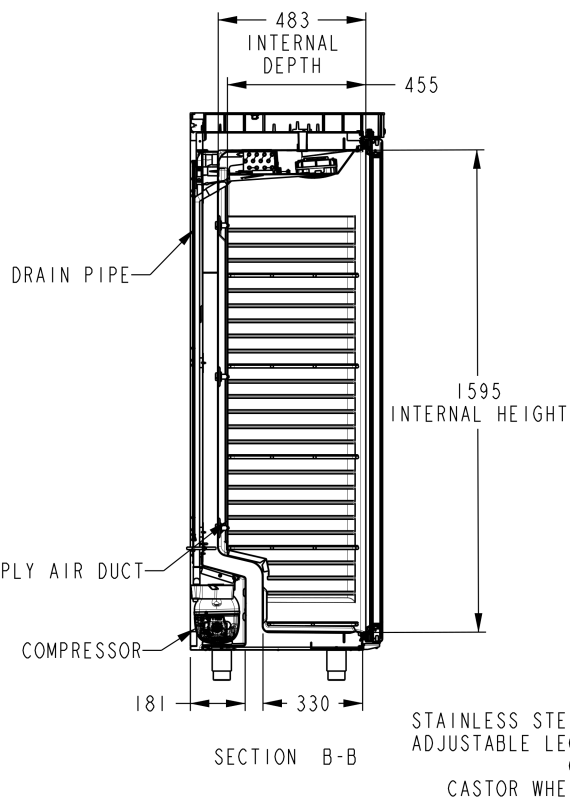

		1	2	3	4	5	6	7	8	
A	ITEM	UPRIGHT GLASS DOOR								
	MODEL NAME	COMPACT FG420								
	POWER SUPPLY	SINGLE PHASE, 220-240V AC, 50HZ								
	POWER CORD	3M / AMPERAGE AS PER COUNTRY SPECIFICATION								
B	OUTSIDE DIMENSIONS (mm)	595(W)X667(D)X1776+A(H)								
	INSIDE DIMENSIONS (mm)	490(W)X483(D)X1595(H)								
	EXTERIOR MATERIAL	PRE-COATED SHEET / STAINLESS STEEL SS430								
	INTERIOR MATERIAL	HIPS								
C	INSULATION	POLYURETHANE FOAM (CFC FREE)								
	INSULATION FOAM BLOWING AGENT	CYCLOPENTANE								
	REFRIGERATION SYSTEM	FORCED COOLING								
	COMPRESSOR	EMBRACO								
D	CONDENSER	WIRE ON TUBE TYPE								
	EVAPORATOR	COPPER TUBE								
	REFRIGERANT	R600a								
	OPERATING CONDITIONS	CLIMATIC CLASS 3 : +25°C / 60% RH								
E	TEMPERATURE RANGE	-19°C TO -5°C								
	CASTOR / LEGS / QUANTITY	4NOS OF ADJUSTABLE LEGS (100-130mm) OR 4NOS OF ADJUSTABLE LEGS (130-200mm) OR 4NOS OF CASTOR WHEELS (125mm)								
	SHELF	4NO BIG SHELF + 1NO SMALL SHELF								
F										
		1	2	3	4	5	6	7	8	