
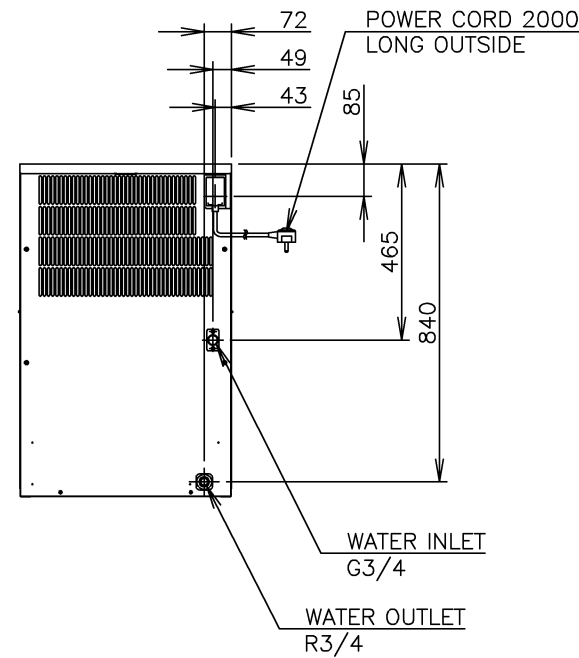
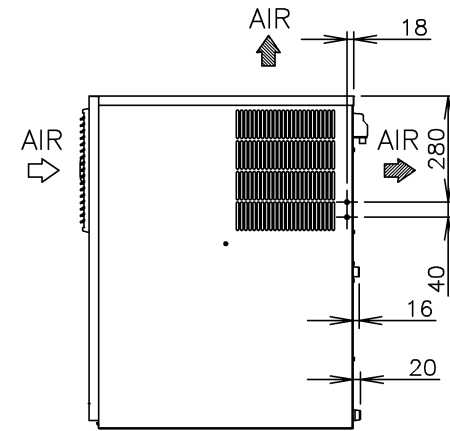
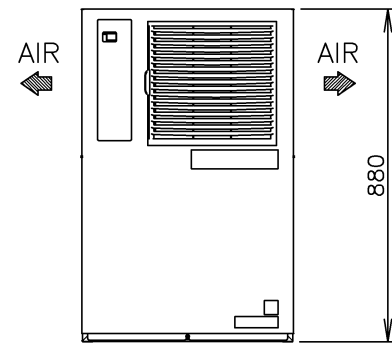



1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: M037

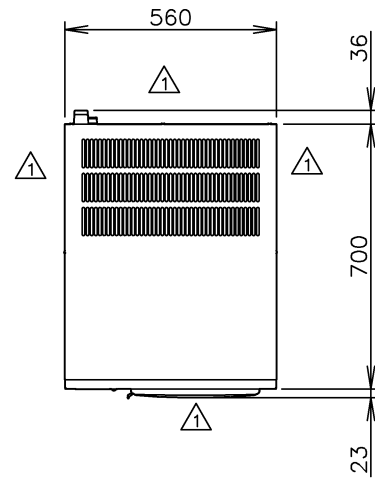

ITEM	Hoshizaki Cube Ice Maker	
MODEL	IM-130ANE-HC	
POWER SUPPLY	1 PHASE 220-240V 50Hz Capacity: Min. 1.43kVA (6.0A)	
AMPERAGE	Running: 4.5A Rated Motor: 4.5A Starting: 19A	
ELECTRIC CONSUMPTION	Rated Motor: 635W (Power factor: 60%)	
ICE PRODUCTION PER 24h	Approx. 110(5mm)/125(15mm)kg (AT.10°C, WT.10°C) Approx. 100(5mm)/110(15mm)kg (AT.21°C, WT.15°C) Approx. 85(5mm)/95(15mm)kg (AT.32°C, WT.21°C)	
WATER CONSUMPTION PER 24h	Approx. 0.52m <sup>3</sup> (AT.10°C, WT.10°C) Approx. 0.23m <sup>3</sup> (AT.21°C, WT.15°C) Approx. 0.20m <sup>3</sup> (AT.32°C, WT.21°C)	
SHAPE OF ICE	Cube Approx. 28 x 28 x 32mm	
FREEZE CYCLE TIME	Approx. 21min (AT.21°C, WT.15°C)	
ICE PRODUCTION PER CYCLE	Approx. 1.8kg/80pcs.(AT.21°C, WT.15°C)	
△ OUTSIDE DIMENSIONS	560mm(W) x 700mm(D) x 880mm(H)	
△ EXTERIOR	Stainless Steel	
△ INSULATION	Polyurethane Foam	
△ INSULATION FOAM BLOWING AGENT	Water Blown	
CONNECTIONS - ELECTRIC	X-Type Con. (with CONT. Plug)	
CONNECTIONS - WATER SUPPLY	Inlet G3/4 (connected at rear side)	
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)	
ICE MAKING SYSTEM	Cell type	
HARVESTING SYSTEM	Hot Gas Defrost	
COMPRESSOR	Hermetic	
CONDENSER	Air-cooled, Spiral tube type	
HEAT REJECTION	1310W (AT.32°C, WT.21°C)	
△ EVAPORATOR	Electroless nickel plated Copper Tube on Sheet and Cells	
REFRIGERANT CONTROL	Thermostatic Expansion Valve	
REFRIGERANT CHARGE	R290/110g	
ICE MAKING CONTROL SYSTEM	Thermistor, Timer	Controller Board
HARVESTING CONTROL SYSTEM	Thermistor	
BIN CONTROL SYSTEM	Microswitch with Time Delay	
ICE MAKING WATER CONTROL	Timer, Water Pan's movement	
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse	
COMPRESSOR PROTECTION	Overload Protector(Auto-reset) Pressure Switch (Auto-reset)	
ICE MAKER PROTECTION	Interlock by Controller Board	
GAS LEAK DETECTION	Gas Sensor	
WEIGHT	Net weight 68kg/Gross weight 79kg	
PACKAGE	Carton 820mm(W) x 665mm(D) x 1054mm(H)	
ACCESSORIES	Scoop, Installation Kit, Ice Chute	
OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Temp.: 5-35° C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage±6%	

# HOSHIZAKI CUBE ICE MAKER IM-130ANE-HC

APPROVED KUROYANAGI	CHECKED MORIMOTO	DESIGNED UEDA	DRAWN WATANABE	SCALE 1/20	TRIGONOMETRY
YAMASAKI	SATO	△	2018.01.31	DATE 2014.09.04	DRAWING NO. D14113
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △